


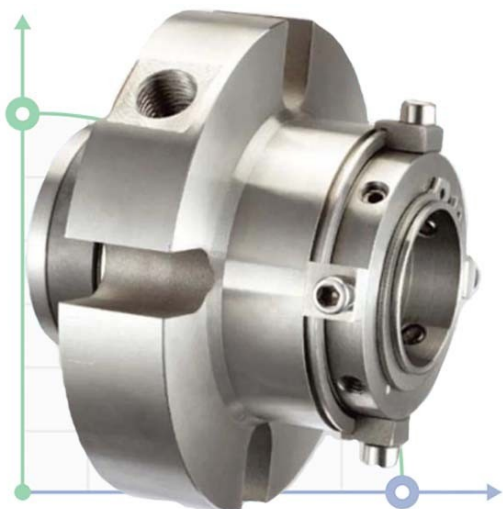

Торцевое уплотнение R-CARTEX(DN)



Температура: $-40^{\circ}\sim 220^{\circ}$

Давление: ≤ 2.5 МПа

Скорость: ≤ 16 м/сек

Материалы

- 1 Вращающееся кольцо: SiC/TC.
- 2 Неподвижное кольцо: SiC/TC/Carbon.
- 3 Вторичное уплотнение: VITON / PTFE/ Encapsulated / NBR / Kalrez.
- 5 Другие части: C-276/Duplex/316/304.

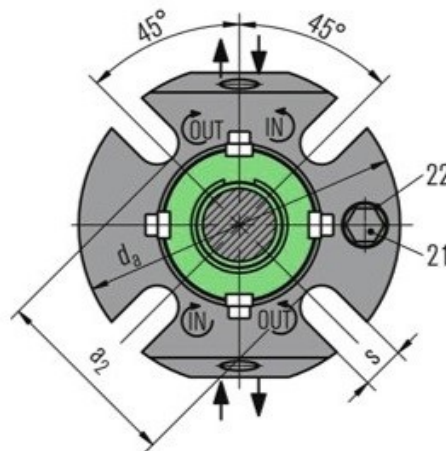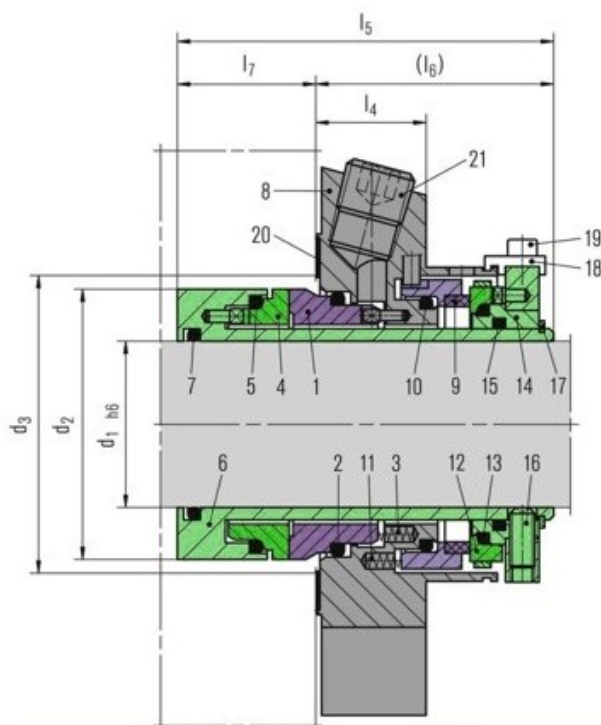

d ₁	d ₂	d ₃ min.	d ₃ max.	l ₄	l ₅	l ₆	l ₇	a ₂	d _a	s
25	43,0	44,0	51,5	25,4	86,5	53,4	33,1	62	105	13,2
28	46,0	47,0	52,0	25,4	86,5	53,4	33,1	61	105	13,2
30	48,0	49,0	56,0	25,4	86,5	53,4	33,1	67	105	13,2
32	49,8	51,0	57,0	25,4	86,5	53,4	33,1	70	108	13,2
33	49,8	51,0	57,0	25,4	86,5	53,4	33,1	70	108	13,2
35	53,0	54,0	61,5	25,4	86,5	53,4	33,1	72	113	13,2
38	56,0	57,0	66,0	25,4	86,5	53,4	33,1	75	123	13,2
40	58,0	59,0	68,0	25,4	86,5	53,4	33,1	77	123	14,2
42	60,5	61,5	69,5	25,4	86,5	53,4	33,1	80	133	14,2
43	60,5	61,5	70,5	25,4	86,5	53,4	33,1	80	133	14,2
45	62,5	64,0	73,0	25,4	86,5	53,4	33,1	82	138	14,2
48	65,6	67,0	75,0	25,4	86,5	53,4	33,1	85	138	14,2
50	68,0	69,0	78,0	25,4	86,5	53,4	33,1	87	148	14,2
53	72,0	73,0	87,0	25,4	86,5	53,4	33,1	97	148	18,0
55	73,0	74,0	83,0	25,4	86,5	53,4	33,1	92	148	18,0
60	78,0	79,0	91,0	25,4	86,5	53,4	33,1	102	157	18,0
65	84,8	85,7	98,5	25,4	86,5	53,4	33,1	109	163	18,0
70	93,0	95,0	108,0	25,4	86,5	53,4	33,1	118	178	18,0
75	100,0	101,6	118,0	28,0	108,0	63,9	44,1	129	190	18,0
80	106,4	108,0	124,0	28,0	108,0	63,9	44,1	135	195	18,0
85	109,5	111,1	128,0	28,0	108,0	63,9	44,1	139	198	22,0
90	115,9	117,5	135,0	28,0	108,0	63,9	44,1	145	205	22,0
95	119,1	120,7	138,0	28,0	108,0	63,9	44,1	148	208	22,0
100	125,4	127,0	144,0	28,0	108,0	63,9	44,1	154	218	22,0